



## WAX RIBBON


### Technical data sheet

#### PERFORMANCE CHARACTERISTICS

- ❖ Covers thermal Transfer Polyester film ribbons
- ❖ A thermal transfer ribbon specially designed for printing bar codes and alphanumeric characters on a specified range of thermal transfer printers
- ❖ A thermal transfer ribbon specially designed for printing bar codes and alphanumeric characters on a specified and recommended range of label stocks.

#### FORMULATION TECHNICAL INFORMATION

Base polyester film	6.0-6.4 gsm
Thickness	4.4-4.6 microns
Coated weight	3.5-3.7 gsm
Back coating weight	0.05-0.08 gsm
Ink melting pot	63°-65° C
Printing density	1.95 Macbeth densitometer

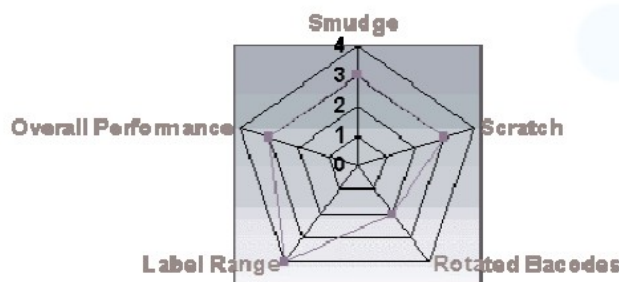

Our recommendations are based on our experience and up-to-date knowledge. As the products are used outside our control, we cannot take the responsibility for any damage which could be caused when using the product. This technical information sheet replaces all earlier ones. All information could be changed without notice.